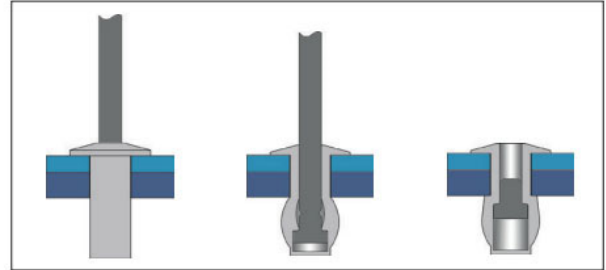
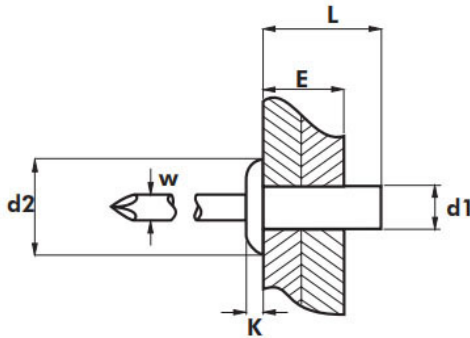








ISO 15976 St/St Заклепка витяжна герметична з плоским буртиком Bralo



Розмір/Діаметр

d1	3,2				4,0			
L	6,0	8,0	9,5	12,0	8,0	10,0	12,0	15,0
E	0,5-1,5	1,5-3,0	3,0-5,0	5,0-6,5	1,5-3,0	3,0-5,0	5,0-6,5	6,5-10,5
	3,30				4,10			
d2	6,50				8,20			
K	1,00				1,40			
W	1,90				2,30			
 (N)	1150				1700			
 (N)	1300				1550			
d1	4,8							
L	9,5	12,0	16,0	18,0				
E	1,0-4,0	4,-6,0	6,0-11,5	8,0-13,5				
	4,90							
d2	9,80							
K	1,70							
W	2,90							
 (N)	2400							
 (N)	2800							

d1- діаметр
 L - довжина
 E - діапазон товщини
 d2 - діаметр буртика
 K - ширина буртика
 W - діаметр цвяшка